



DLW-Safety features

DLW protector system to avoid accidents

The standard safety shield protects against crushing and unintentional intervention when operating the DLW. With the optional accessories such as the maintenance unit or the remote control, safety can be further increased.

- Safety shield „Shark fin“ (standard)
- Remote control to adjust the feed (optional)
- Safety maintenance unit with emergency stop and foot pedal (optional)




DLW-IBT

Internal machining of steel pipes

The „Inside-Beveling-Tool“ (IBT) consists of a negative threaded rod for the tool holder (2 Tool tips) and a special insert holder. With this combination, a bevel of max. 25 mm at an angle of 30° degrees is possible.



- Easy installation
- High repeatability
- Adaptation of pipes in the factory or directly on the construction site

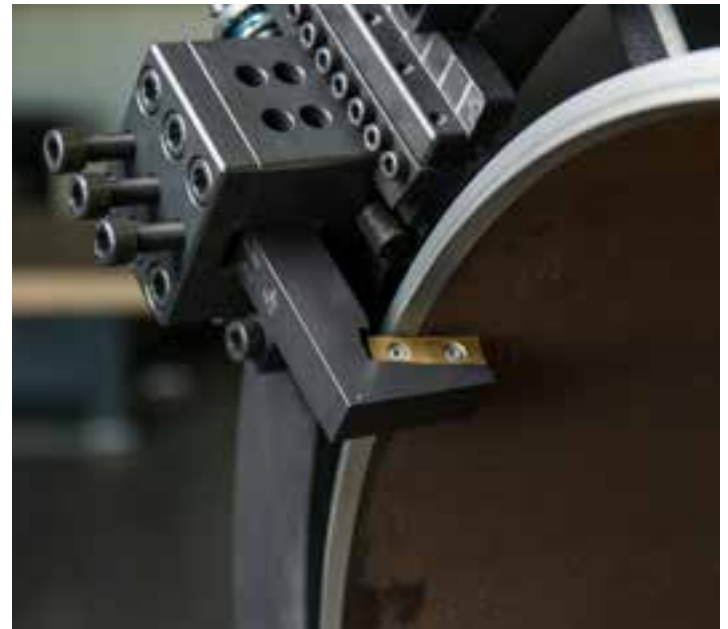

DLW-CB III

Internal machining of steel pipes

The internal boring device can be used for seam preparation of the inner diameter and the inner bore of max. 200 mm depth, after cutting the pipes. The angle is adjustable from 0° - 25°.

Advantages:

- High repeatability
- Adjustment of pipes in the factory or directly on the construction site
- Modular design, easy installation

