

## Mechanical flange spreader


Bolt diameter: 16 - 25 mm

With the flange spreaders, pipe flanges can be separated or lifted quickly, safely and easily within seconds in order to carry out maintenance.

- 4 Various models to cover all flange sizes
- Hardened wedge for safe cutting
- Spindle can be turned with conventional spanner or 12 mm round bar
- Large feed spindle



Part No.	Description	Spreading diameter mm	Bolt diameter mm	Weight kg
RG350175	Flange spreader FS-76	76	16	5,2
RG350176	Flange spreader FS-101	101	19	5,4
RG350177	Flange spreader FS-127	127	22	6,0
RG350178	Flange spreader FS-162	162	25	6,6

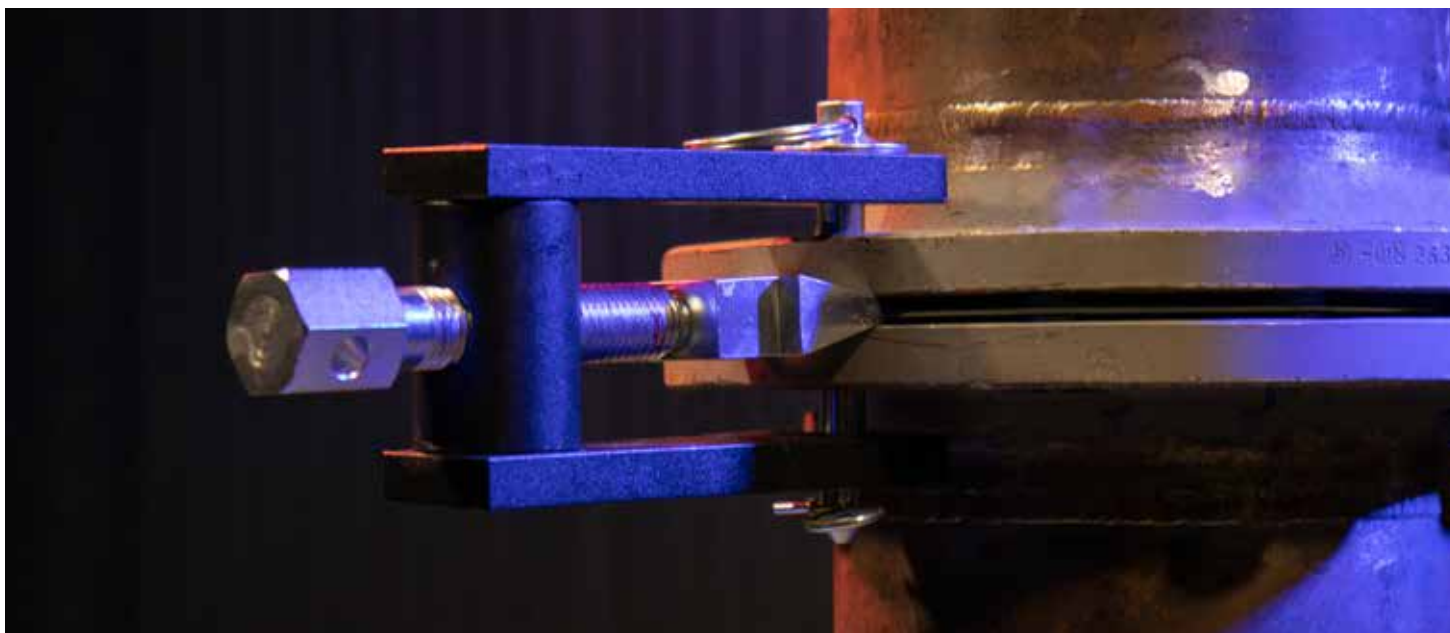

DWT, DWT PIPETOOLS, DWT ECOINERT and the respective logos are registered trademarks of DWT GmbH, its subsidiaries and/or affiliated companies. All other logos and trademarks are the property of their respective owners.

In commercial dealings, the information in this brochure does not form the basis for warranty claims or contractual agreements regarding the products described, unless express reference is made to the descriptions given here. Only DWT's terms and conditions of business, which are available on request, shall ever apply to all warranty, delivery and other contractual conditions. Product improvement is a constant endeavour of DWT. Design and specifications are subject to change without notice. Product illustrations may differ from the final product in individual cases.