




Single chain clamp

Clamping ranges: 203,2 - 1.524 mm (8 - 60")

- Max. Wall thickness: 12,7 mm
- The chain can be adapted to the respective pipe dimension by removing the chain links and alignment levers

Part No.	Description	Range OD Inch	Range OD mm	Number jack-bars	Weight kg
RG350040	Single chain clamp	8 - 10	203 - 254	5	8,3
RG350041		8 - 12	203 - 304	6	9,5
RG350042		8 - 16	203 - 406	7	10,6
RG350043		8 - 20	203 - 508	9	13,0
RG350044		8 - 24	203 - 609	11	15,3
RG350045		8 - 28	203 - 711	13	17,7
RG350046		8 - 32	203 - 812	14	18,8
RG350047		8 - 36	203 - 914	16	21,2
RG350048		8 - 40	203 - 1.016	18	23,5
RG350049		8 - 44	203 - 1.117	19	24,7
RG350050		8 - 48	203 - 1.219	21	27,0
RG350051		8 - 52	203 - 1.320	23	29,4
RG350052		8 - 56	203 - 1.422	25	31,7
RG350053	8 - 60	203 - 1.524	26	32,9	

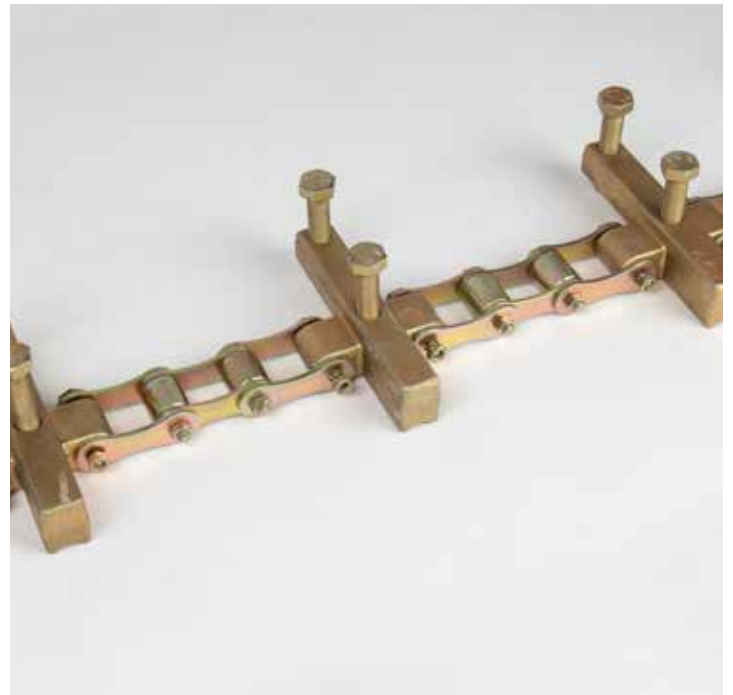

Accessories

for single chain clamp

- Individual solutions through modular individual parts

Part No.	Description	Weight kg
RG350068	Swivel for single chain	2,2
RG350069	Single jack-bar	0,8
RG350070	2-link chain	0,2
RG350071	3-link chain	0,3
RG350072	2-link chain with jack-bar	2,5
RG350073	3-link chain with jack-bar	1,2



3-link chain with jack-bar
(177 mm length)

2-link chain with jack-bar
(137 mm length)

Swivel

2-link chain

3-link chain